


## PTFE LINED BUTTERFLY VALVE FOR CORROSIVE FLUIDS



### REFERENCES :

|             |              |
|-------------|--------------|
| VP4449-PTFE | VP4449R-PTFE |
| VP4649-PTFE | VP4649R-PTFE |

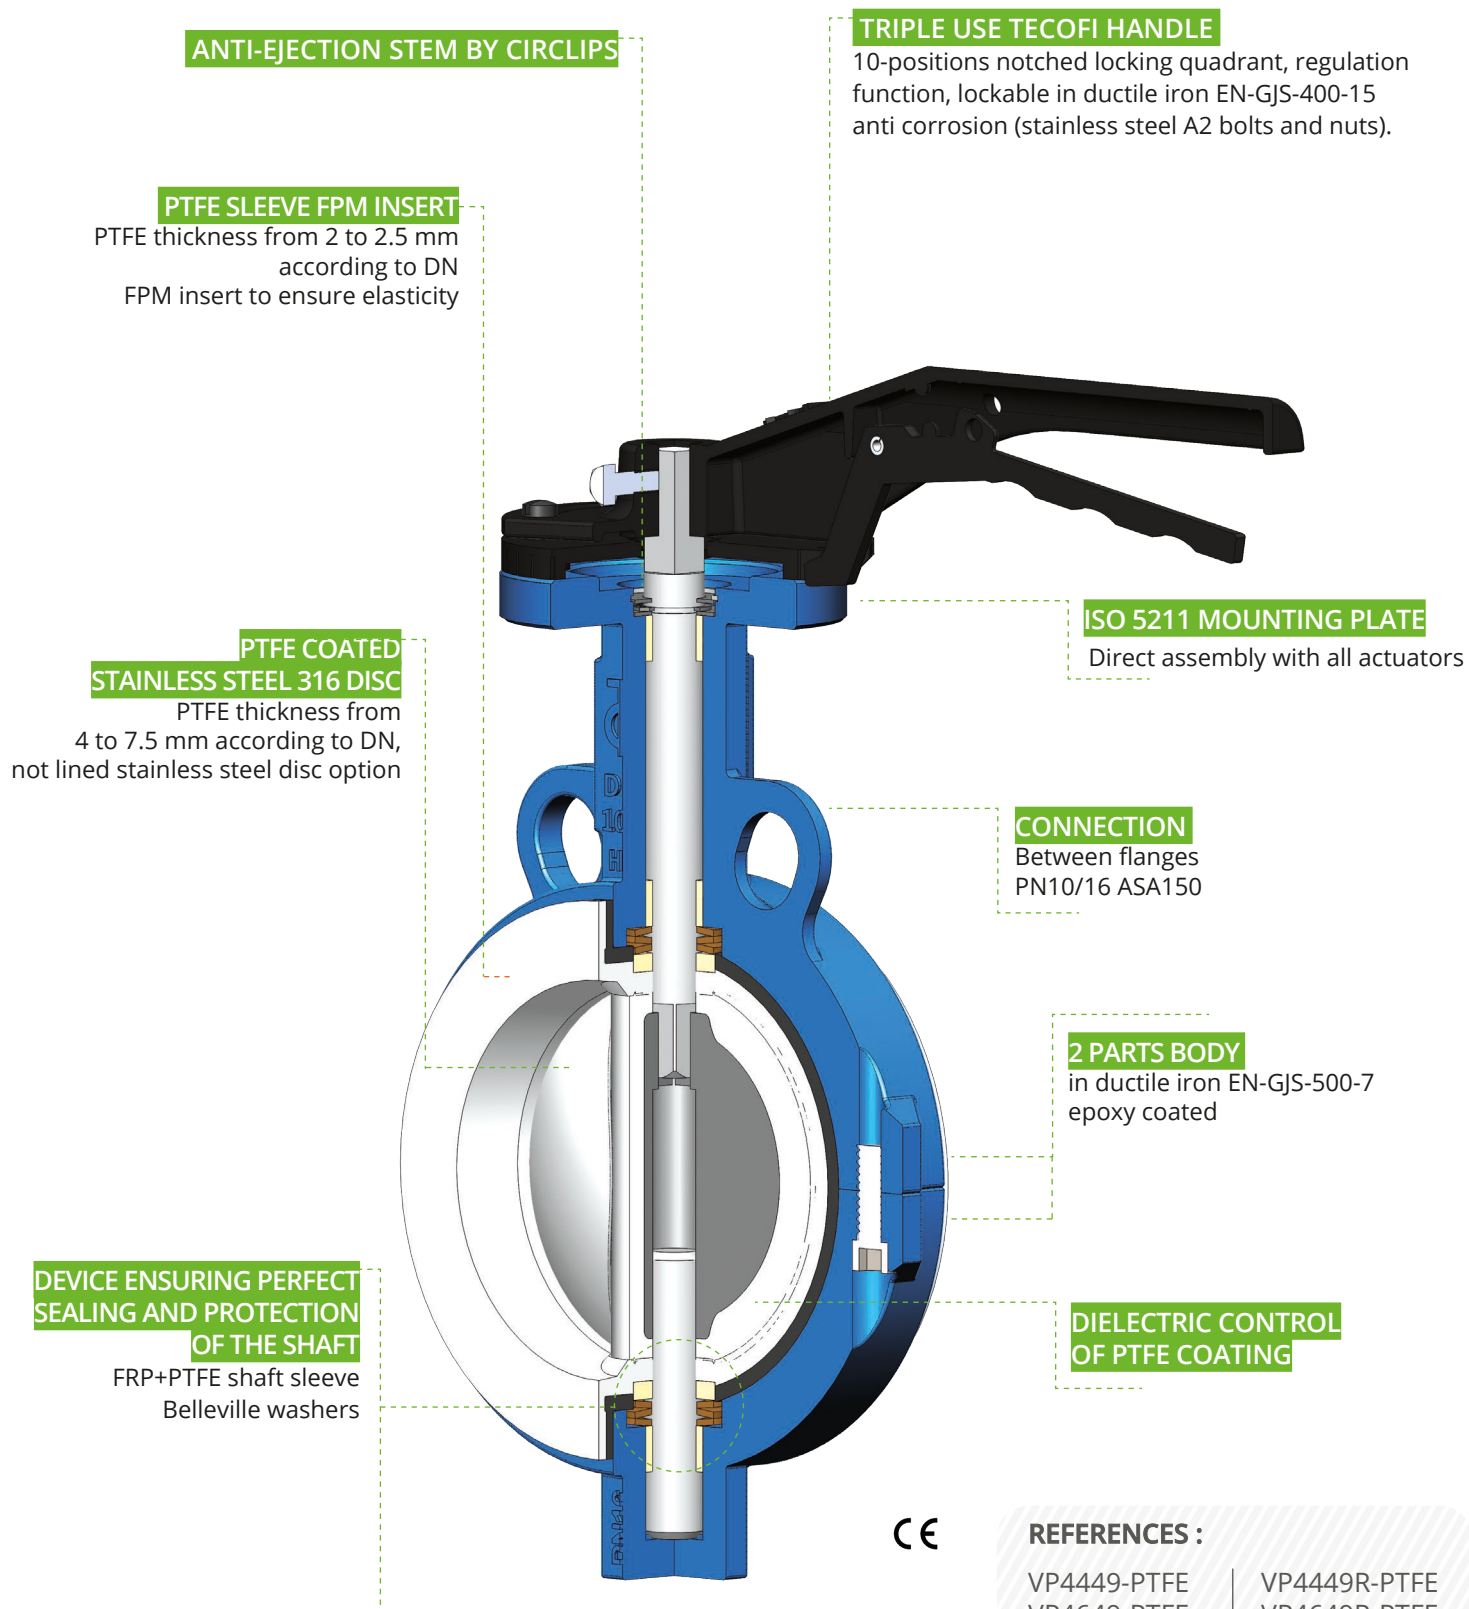

## APPLICATION

Chemical, acids, corrosive products



## STANDARD

Manufacture according to the requirements of the European directive 2014/68/EU

«Equipment under pressure»: modulate H.

- Face to face according to standards API609, ISO 5272 series 20.
- Assembling between flanges PN 10 / PN 16 – ASA150
- Dielectric control of PTFE coating
- CE marking



## HANDLING POSSIBILITIES

- Triple use lever Tecofi
- Manual gearbox
- Double and single acting pneumatic actuators
- Electric actuators




## DESIGN

- Range from DN40 to DN300
- Two pieces body in ductile iron EN-GJS-500-7 epoxy coated
- Stainless steel 316 disc PTFE coated
- Not lined stainless steel disc option
- Two ways tight



## WORKING CONDITIONS

- Working temperature : -20°C/+190°C
- Working pressure:  
DN40/DN150: 16 bar  
DN200/DN300: 10 bar

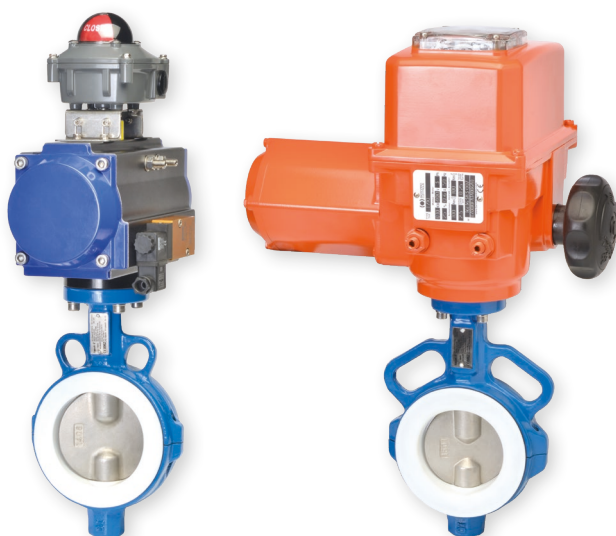

**Linked in**

Suivez nous sur  
notre page

Contactez-nous  
[sales@tecofi.fr](mailto:sales@tecofi.fr)

Tous nos produits et  
fiches techniques  
sur notre site

[www.tecofi.fr](http://www.tecofi.fr)

**Tecofi**   
VALVE MANUFACTURER - FRANCE

83 rue Marcel Mérieux - CS 92013  
69969 Corbas Cedex - France

T. +33 (0)4 72 79 05 79  
F. +33 (0)4 78 90 19 19  
✉ [sales@tecofi.fr](mailto:sales@tecofi.fr)