

# BUTTERFLY VALVE

WATER, AIR, OIL, HYDROCARBONS



ACTUATED GEARBOX OPERATOR  
WITH POSITION INDICATOR

ISO TOP FLANGE FOR  
ACTUATOR

Low operating torque


ADJUSTABLE STOPS

DUCTILE IRON BODY  
EN-GJS-400-15 EPOXY  
COATED 250 MICRONS

WAFFER TYPE WITH SMOOTH  
EARS FROM DN350 TO DN600

WAFFER CONNECTION PN10 OR  
PN16 ACCORDING TO EN1092-2

(PN25/ASA150, others on request)

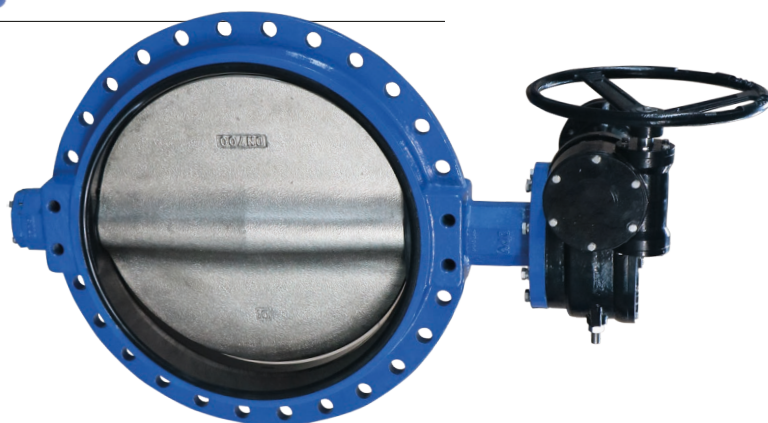

On demand



WAFFER TYPE WITH MIDDLE FLANGE FROM DN700

Recommended mounting for large DN, from DN400.