

Ref. : ADTPE
 Rev. : Initial
 Date : 02/04/2015
 Page : 1/1

FLANGE ADAPTOR FOR POTYETHYLENE PIPES

ADTPE



APPLICATION


General use: for joining polyethylene pipes.

GENERAL CHARACTERISTICS

Range from Ø63 to Ø400.
 Epoxy coated body (250 microns thickness)
 in ductile iron.
 Bichromate bolts and nuts.
 EPDM rubber seals.
 Mechanical locking by the grip ring to avoid
 axial movements.

DIMENSIONS

DN	Ø	L1	L2
50-60-65	63	109	Ø175
50-60-65	75	109	Ø175
80	90	114	Ø200
100	110	119	Ø224
100	125	119	Ø254
125	125	119	Ø254
125	140	124	Ø254
150	160	139	Ø285
150	180	139	Ø285
200	200	162	Ø340
200	225	172	Ø340
250	250	184	Ø405
250	280	177	Ø405
300	315	207	Ø472
400	400	317	Ø580

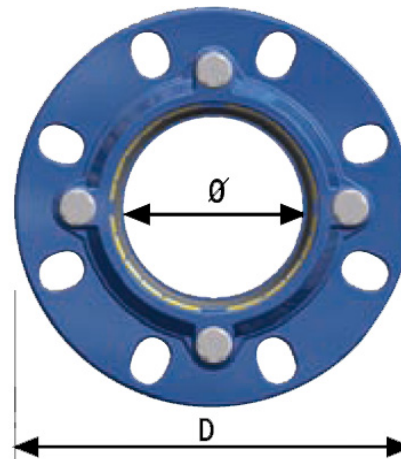

WORKING CONDITIONS

Maximum working pressure : 16 bar.

STANDARDS

Flange according to EN 1092-2 PN10/16.