

Ref. : CR 3203 pas

Rev. : Initial

Date : 22/10/2013

Page : 1/1

STRAINER

CR 3203



Tecofi'
VALVE DESIGNER - FRANCE

APPLICATION

General use : for all common fluids.

GENERAL CHARACTERISTICS

From DN3/8" to DN 4".
Nylon threaded male BSP.
Stainless steel mesh.


CONSTRUCTION

| Pos. | Description | Material |
|------|-------------|---------------------|
| 2 | Mesh | Stainless steel 304 |
| 1 | Threaded | Nylon |



DIMENSIONS

| DN | | H | ØA | Mesh | Weight (kg) |
|-----|-------|-----|-----|------|-------------|
| mm | inch | | | | |
| 10 | 3/8" | 49 | 24 | 1,2 | 0,008 |
| 15 | 1/2" | 50 | 28 | 1,2 | 0,010 |
| 20 | 3/4" | 57 | 32 | 1,2 | 0,017 |
| 25 | 1" | 63 | 41 | 1,2 | 0,025 |
| 32 | 1"1/4 | 68 | 50 | 1,2 | 0,034 |
| 40 | 1"1/2 | 79 | 55 | 1,2 | 0,042 |
| 50 | 2" | 95 | 67 | 1,2 | 0,064 |
| 65 | 2"1/2 | 96 | 86 | 1,5 | 0,095 |
| 80 | 3" | 113 | 99 | 1,5 | 0,13 |
| 100 | 4" | 128 | 122 | 2,0 | 0,168 |

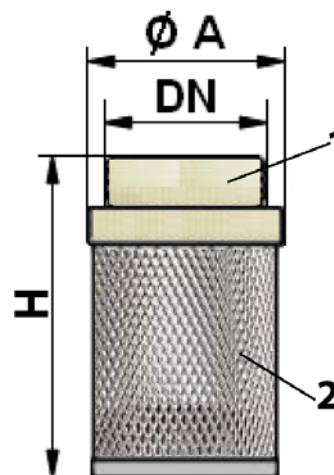

WORKING CONDITIONS

Maximum working temperature : -10°C / +110°C

STANDARDS

Fabrication according to ISO 9001 :2000
Threaded male BSP cylindrical end according to ISO 228-1.