

Ref. : F3240TAMIS-IN

Rev. : Initial

Date : 08/01/2014

Page : 1/1

# Screen for flanged type strainer F 3240EP PN16

## F3240TAMIS-IN



### APPLICATION

For all types of fluids.

### GENERAL CHARACTERISTICS


Stainless steel screen.  
Rolled, welded construction.

### CONSTRUCTION

Stainless steel 304 body

### DIMENSIONS

DN		L	Ø D	K	E	Bore diameters	Weight (kg)
mm	inch						
15	1/2"	69	17	10	0.6	1	0.02
20	3/4"	77.5	23				0.03
25	1	97	27				0.045
32	1 1/4	116.5	35				0.075
40	1 1/2	91.2	42				0.1
50	2"	105.2	52			0.13	
65	2 1/2	127.2	67			1.3	0.18
80	3"	140.7	82				0.25
100	4"	180.2	102				0.34
125	5"	215.7	127				0.48
150	6"	234.2	152	0.63			
200	8"	296.5	202	1.6	1.1		
250	10"	393.5	252		1.76		
300	12"	426	302		2.5		
350	14"	612	362		3.9		
400	16"	689	410		40	5	

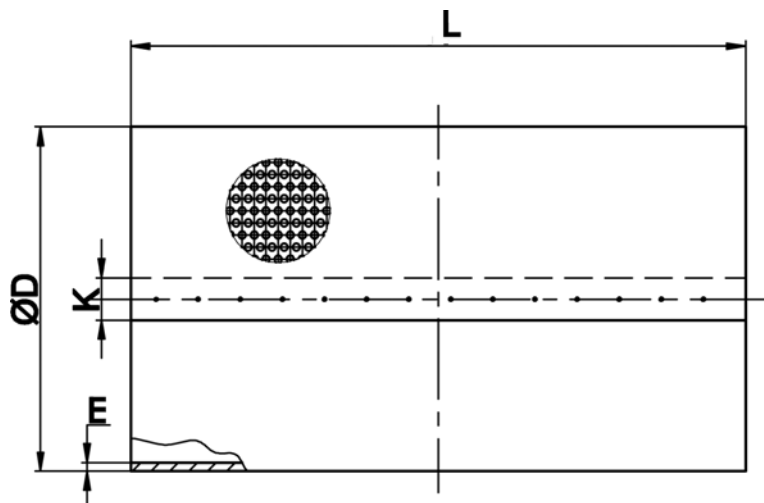

### WORKING CONDITIONS

Maximum working pressure: 16 bar (TS max + 140°C)

Test pressure according to EN 12266-1,  
DIN 3230, BS 5154 and ISO 5208

### STANDARDS

For use only with flanged type PN16 strainer F3240EP