

Ref. : F3240TAMIS-IN

Rev. : Initial

Date : 08/01/2014

Page : 1/1

Tamis pour filtre à brides F 3240EP PN16

F3240TAMIS-IN



Tecofi'
VALVE DESIGNER - FRANCE

APPLICATION

Filtration tous fluides.

CARACTERISTIQUES GENERALES


Tamis inox.
Construction roulé, soudé.

CONSTRUCTION

Corps inox 304

DIMENSIONS

DN		L	Ø D	K	E	Diamètre des trous	Poids (kg)		
mm	inch								
15	1/2"	69	17	10	0,6	1	0.02		
20	3/4"	77.5	23				0.03		
25	1	97	27				0.045		
32	1"1/4	116.5	35				0.075		
40	1"1/2	91.2	42				0.1		
50	2"	105.2	52				0.13		
65	2"1/2	127.2	67			1.3	0.18		
80	3"	140.7	82				0.25		
100	4"	180.2	102				0.34		
125	5"	215.7	127				0.48		
150	6"	234.2	152	15	0.8	1.6	0.63		
200	8"	296.5	202				1.1		
250	10"	393.5	252				1.76		
300	12"	426	302				2.5		
350	14"	612	362				30	1,2	3.9
400	16"	689	410				40		5

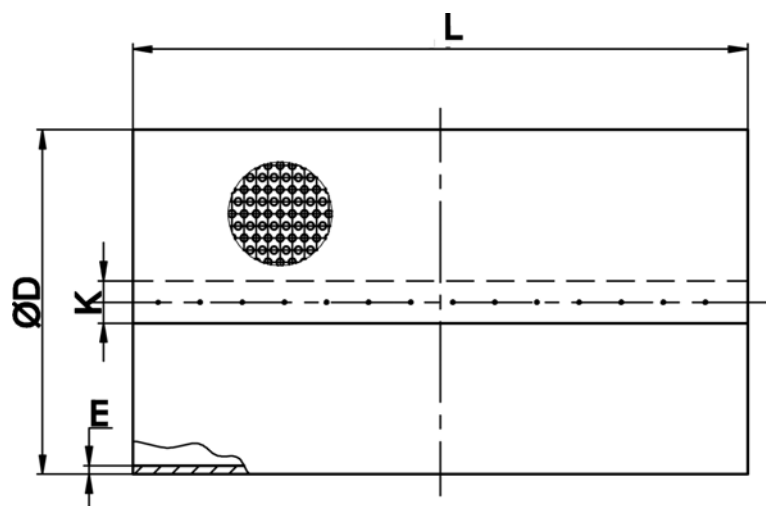

CONDITIONS DE SERVICE

Pression de service maxi :

16 bar (TS max + 140°C)

Pression d'essai suivant les normes EN 12266-1,
DIN 3230, BS 5154 et ISO 5208

AGREMENT ET NORMES

Montage et utilisation uniquement sur filtre F3240EP à brides PN16.