

Ref. : JT5200.pas

Rev. : Initial

Date : 30/12/2013

Page : 1/1

DISMANTLING JOINTS PN10

JT5200



Tecofi 
VALVE DESIGNER - FRANCE

APPLICATION


General use : for easy installation and dismantling of valves.

GENERAL CHARACTERISTICS

Range : from DN 200 up to DN 1200.
Rigid connection between the connecting pipes.
Long course.
PN10.

CONSTRUCTION

6		Nut	Steel 6.8	
5		Stud bolt	Steel 6.8	
4	1	Sealing ring	EPDM	
3	1	Retaining flange	Carbon steel	S-235 JR
2	1	Flanged pipe - long	Carbon steel	S-235 JR
1	1	Flanged pipe - short	Carbon steel	S-235 JR
Pos.	Qty.	Description	Material	

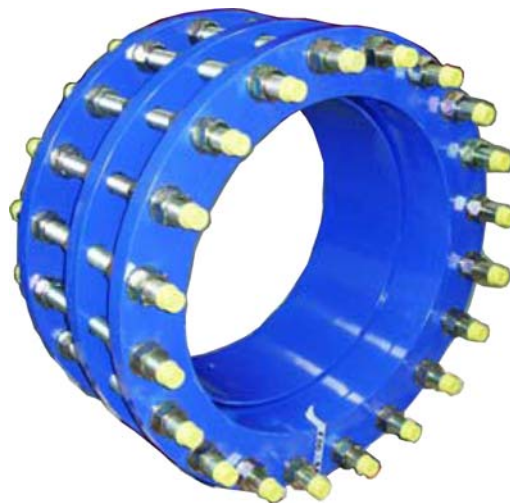

DIMENSIONS

DN		L	L1	Ø D	Ø K	T	C	n x Ø L	Weight (kg)
mm	inch								
200	8"	280	430	340	295	40	24	8 x 20	53
250	10"	280	430	395	350	40	26	12 x 20	72
300	12"	280	430	445	400	40	26	12 x 20	81
350	14"	280	430	505	460	40	28	16 x 20	109
400	16"	280	450	565	515	40	32	16 x 24	150
450	18"	330	530	615	565	50	38	20 x 24	180
500	20"	330	530	670	620	50	38	20 x 24	206
600	24"	330	550	780	725	50	40	20 x 27	264
700	28"	330	550	895	840	50	40	24 x 27	329
800	32"	400	650	1015	950	60	44	24 x 30	454
900	36"	400	650	1115	1050	60	48	28 x 30	537
1000	40"	400	660	1230	1160	60	50	28 x 33	674
1200	48"	450	730	1455	1380	70	54	32 x 36	947

