

Ref. : JT5260.pas

Rev. : Initial

Date : 19/02/2015

Page : 1/1

DISMANTLING JOINTS PN40

JT5260



Tecofi 
VALVE DESIGNER - FRANCE

APPLICATION


General use : for easy installation and dismantling of valves.

GENERAL CHARACTERISTICS

Range : from DN 200 up to DN 600.
Rigid connection between the connecting pipes.
Long course.
PN40.

CONSTRUCTION

6		Nut	Steel 6.8	
5		Stud bolt	Steel 6.8	
4	1	Sealing ring	EPDM	
3	1	Retaining flange	Carbon steel	S-235 JR
2	1	Flanged pipe - long	Carbon steel	S-235 JR
1	1	Flanged pipe - short	Carbon steel	S-235 JR
Pos.	Qty.	Description	Material	

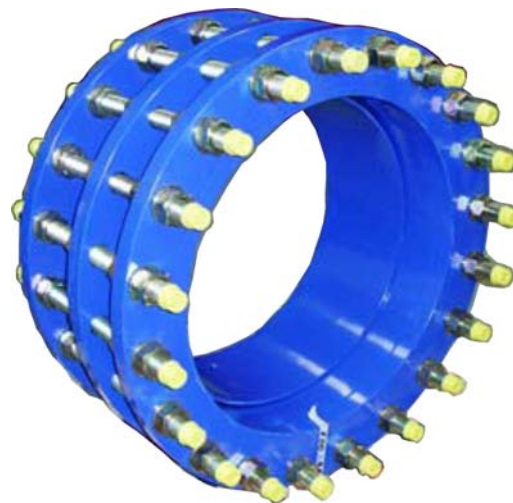

DIMENSIONS

DN		L	L1	Ø D	Ø K	T	C	n x ØL	Poids (kg)
mm	inch								
200	8"	310	500	375	320	40	36	12 x 27	99
250	10"	310	530	450	385	40	38	12 x 30	138
300	12"	310	530	515	450	40	42	16 x 30	192
350	14"	360	580	580	510	40	46	16 x 33	255
400	16"	360	600	660	585	40	50	16 x 36	359
450	18"	360	600	685	610	40	52	20 x 36	382
500	20"	360	610	755	670	40	52	20 x 39	466
600	24"	420	700	890	795	50	54	20 x 45	655

