

Ref. : STABPN1016

Rev. : Initial

Date : 08/07/2015

Page : 1/1

# FLOW STABILIZER

## STABPN1016




### APPLICATION

Stabiliser for water meter WOLTMANN with axial or helical spiral.

### GENERAL CHARACTERISTICS

Range: from DN50 to DN150.  
Body in high strength carbon steel.  
Epoxy recovery protection.  
Low head losses.  
Flange connection PN10/16.

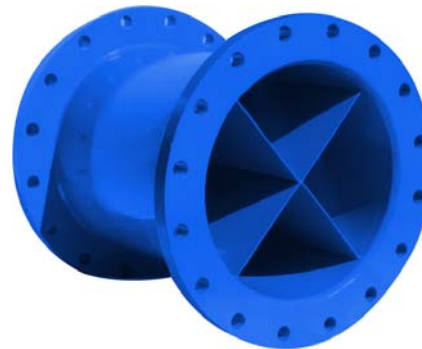

### DIMENSIONS

DN		L	ØD	ØK	n	Maximum flow (m3/h)	Weight (kg)
mm	inch						
50	2"	200	165	125	4	30	20
65	2" 1/2	200	185	145	4	100	21
80	3"	225	200	160	8	150	23
100	4"	300	220	180	8	250	25
125	5"	300	250	210	8	350	25
150	6"	350	280	240	8	500	30

### STANDARDS

Flange connection PN 10/16 , according to standards EN 1092-2, BS450, AISI B16.1-5.

