

Ref. : STABPN10

Rev. : Initial

Date : 08/07/2015

Page : 1/1

FLOW STABILIZER

STABPN10



Tecofi'
VALVE DESIGNER - FRANCE

APPLICATION



Stabiliser for water meter WOLTMANN with axial or helical spiral.

GENERAL CHARACTERISTICS

Range: from DN200 to DN1000.
Body in high strength carbon steel.
Epoxy recovery protection.
Low head losses.
Flange connection PN10.

DIMENSIONS

DN		L	ØD	ØK	n	Flow (m3/h)	Weight (kg)
mm	inch						
200	8"	500	340	295	8	900	38
250	10"	500	395	350	12	1100	38
300	12"	550	445	400	12	1250	59
400	16"	550	565	515	16	2100	89
500	20"	620	670	620	20	3200	134
600	24"	800	780	725	20	2300	250
700	28"	800	895	840	24	3800	290
800	32"	800	1015	950	24	-	-
900	36"	800	1115	1050	28	6840	575
1000	40"	-	1230	1160	28	-	-

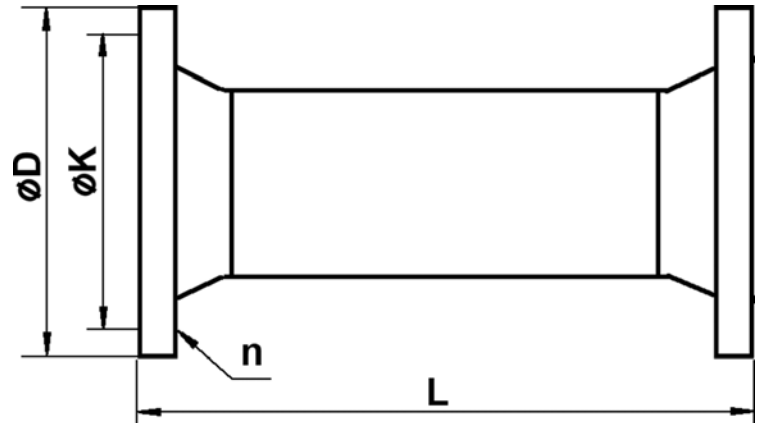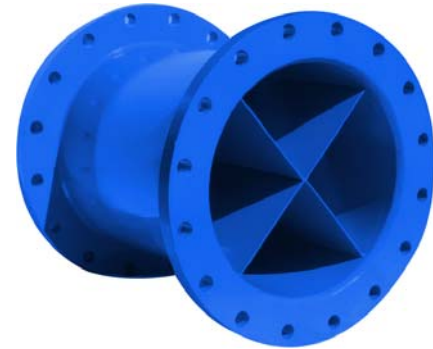

STANDARDS

Flange connection PN 10 , according to standards EN 1092-2, BS450, AISI B16.1-5.