

Ref. : UNIONPVC

Rev. : Initial

Date : 01/04/2015

Page : 1/1

PVC COUPLING UNIONPVC



Tecofi 
VALVE DESIGNER - FRANCE

APPLICATION



General use: coupling for PVC pressure pipes.

GENERAL CHARACTERISTICS

Range from $\varnothing 50$ to $\varnothing 800$.
Epoxy coated body (250 microns thickness).
Bichromate bolts and nuts.
EPDM rubber seals.

DIMENSIONS

\varnothing	L1	L2
50	122	120
63	142	137
75	146	149
90	146	164
110	166	184
125	166	199
140	166	214
160	206	234
180	206	254
200	208	274
250	232	341
315	232	406
400	234	495
500	234	596
630	250	745
710	250	825
800	250	915

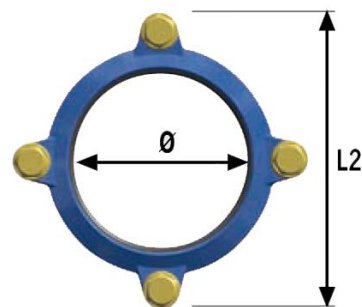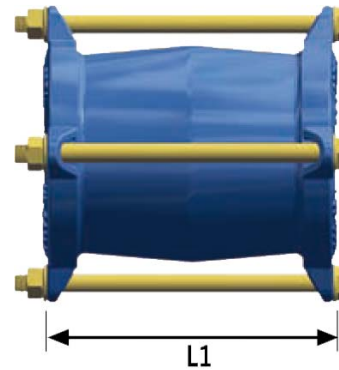

WORKING CONDITIONS

Maximum working pressure : 16 bar.