

Ref. : UNIONUNI

Rev. : Initial

Date : 01/04/2015

Page : 1/1

# UNIVERSAL CLAMP COUPLING

## UNIONUNI



**Tecofi**   
VALVE DESIGNER - FRANCE

### APPLICATION




General use: for joining pipes of different rigid materials, such as cast iron, stainless steel, PVC etc...

### GENERAL CHARACTERISTICS

Range from Ø60 to Ø845.  
Epoxy coated body (250 microns thickness) in ductile iron.  
DACROMET coated bolts and nuts.  
EPDM rubber seals.

### DIMENSIONS

DN	Ø	L1	L2
50	60-80	186	190
65	70-90	186	200
80	88-113	186	223
100	107-132	186	242
125	133-159	206	269
150	159-184	206	296
175	165-195	222	317
200	194-226	222	348
200	216-246	222	368
250	244-276	242	398
250	266-297	242	419
300	315-345	242	469
300	345-375	242	499
350	375-405	242	529
400	400-435	292	565
400	435-470	292	600
450	475-510	292	640
500	499-534	292	665
500	530-565	292	695
600	610-645	292	775
600	645-680	292	810
700	710-745	300	895
800	810-845	300	995

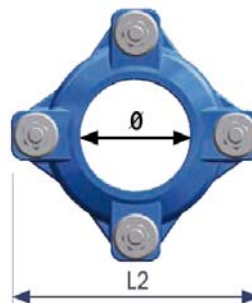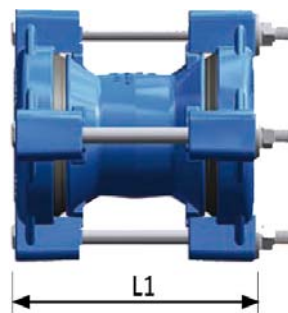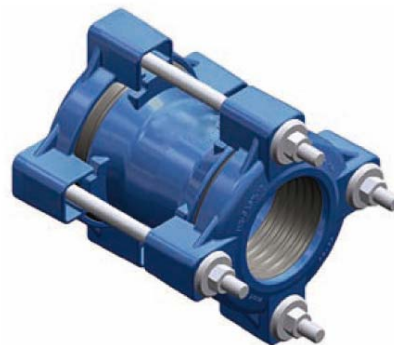

### WORKING CONDITIONS

Maximum working pressure : 16 bar.