

Ref. : VG6400-004.pas

Rev. : H

Date : 28/05/2019

Page : 1/1

KNIFE GATE VALVE STAINLESS STEEL BODY WITH MOUNTING PLATE FOR MOTORIZATION

VG6400-004




APPLICATION

General use : Pulp production, water, water treatment, waste water, chemical industry (powdery or crystallizing products), wine-producing, pulverized products (cement work, pneumatic transport, stocking).

GENERAL CHARACTERISTICS

Range : from DN 50 to DN 600.
Function ON/OFF or regulation.
Wafer threaded mounting ISO PN10.
Unidirectional tightness, direction indication thanks to the arrow on the body.
Small retention zone : the gate is guided in the body and has little clearance.
Gland assembly: packing and O-ring (same materials as seat joint) to assure the elasticity and decrease the operating torque.
Small head loss. Possibility to regulate thick fluids with the adaptation of a diaphragm ring. The range of knife gate valves is conceived to accept normally all the types of electric actuators thanks to its mounting flange of connecting according to the standard ISO 5210.

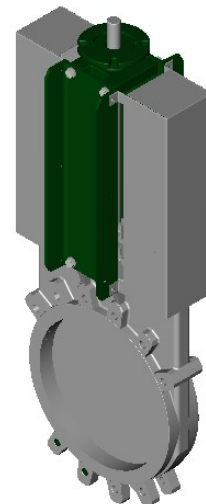



CONSTRUCTION

11	2	Lateral protection	Stainless steel 304	
10	1	O-ring	EPDM	
9**	1	Support ring	Stainless steel X5CrNiMo 17-12-2	DIN: X5CrNiMo18 10 ASTM: A 182 AISI 316 BS: 970 316 S16
8**	1	Gasket	EPDM	
7	1	Packing gland	Stainless steel	
6	1	Embase moteur	Painted steel	
5*	2	Plaque support	Steel + Epoxy	
4	1	Vis de manœuvre	Stainless steel 13%Cr	
3	1	Knife	Stainless steel X5CrNiMo 17-12-2	DIN: X5CrNiMo18 10 ASTM: A 182 AISI 316 BS: 1449-2 316 S16
2	2	Packing	PTFE	
1	1	Body	Stainless steel GX5CrNiMo 19-11-2	DIN: G-X6CrNiMo 18 10 ASTM: A 351 grade CF8M BS: 316 C16
Pos.	Qty.	Description	Material	

*Pre-shaped parts up to DN 300.
** Missing parts on metal / metal tightness.

DIMENSIONS

DN		L	H	h	Ø T	Torque (Nm)	Torque with safety factor (30%)	Turns number for opening	C	D	Ø K	n	Ø M	ISO Mounting flange	Ø A	Ø B	Ø E	Ø F	Ø G	Ø N	Weight (kg)
50	2"	40	305	36		10	13	13	124	83	125	4	4 x M16	F07/F10	70	102	125	9	11	70	6
65	2 1/2"	40	330	43		12	15.6	16	139	83	145	4	4 x M16		8						
80	3"	50	355	40	Tr 20 x 4 to left	21	27.3	20	154	83	160	8	4 x M16		9						
100	4"	50	400	40		20	26	25	174	83	180	8	4 x M16	F07/F10	70	102	125	9	11	70	10
125	5"	50	438	38		29	37.7	31	189	93	210	8	4 x M16		15						
150	6"	60	489	40		23	29.9	38	220	93	240	8	4 x M20		19						
200	8"	60	608	50	Tr 25 x 5 to left	41	53.3	40	275	108	295	8	4 x M20	F10	102	-	125	12	-	70	33
250	10"	70	700	48		56	72.8	50	326	108	350	12	8 x M20		47						
300	12"	70	807	50		42	54.6	60	380	108	400	12	8 x M20		58						
350	14"	96	910	45		70	91	58	450	290	460	16	10 x M20	F10/F14	102	140	175	11	17	100	107
400	16"	100	1020	53	Tr 35 x 6 to left	91	118.3	67	510	290	515	16	10 x M24		137						
450	18"	106	1115	63		115	149.5	75	564	290	565	20	14 x M24		177						
500	20"	110	1225	53		110	143	83	630	290	620	20	14 x M24	F10/F14	102	140	175	11	17	100	212
600	24"	110	1429	50		135	175.5	100	726	290	725	20	14 x M27		256						

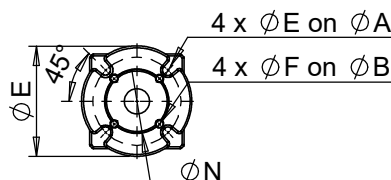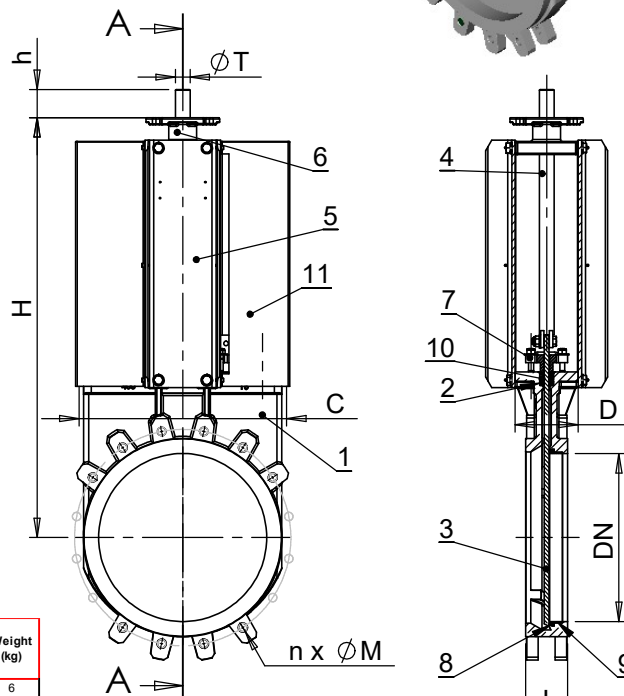

Standard tightness



Metal/metal tightness

WORKING CONDITIONS

Maximum working pressure : DN 50-250 : 10 bar.
DN 300-450 : 7 bar.
DN 500-600 : 4 bar.

Maximum temperature : -10°C / +130°C
(Standard tightness).

STANDARDS

Manufacture according to the requirements of the European directive 2014/68/UE "Equipments under pressure" : modulate H.
Test procedures are established according to standards EN12266-1, DIN 3230, BS 5154 and ISO 5208.
Connections between flanges according to standard EN 1092-2 et DIN 2501 : ISO PN10.

Others materials on request (if marked)	Maximum temperature	
Metal / metal	T max : -10°C / +130°C.	<input type="checkbox"/>
Nitril	T max : -10°C / +80°C.	<input type="checkbox"/>
White EPDM	T max : -10°C / +130°C.	<input type="checkbox"/>
Silicone	T max : -10°C / +170°C.	<input type="checkbox"/>
FPM (Type Viton®)	T max : -10°C / +170°C.	<input type="checkbox"/>
PTFE	T max : +4°C / +170°C.	<input type="checkbox"/>
CSM (Type Hypalon®)	T max : +4°C / +80°C.	<input type="checkbox"/>

TECOFI France - 83, Rue Marcel Mérieux 69960 Corbas - FRANCE
Tél. +33 (0) 4 72 79 05 79 - Fax +33 (0) 4 78 90 19 19 / +33 (0) 4 72 79 05 70
Adresses e-mail : sales@tecofi.fr ; tecofi@tecofi.fr / Site web : www.tecofi.fr