

BUTTERFLY VALVE WITH PNEUMATIQUE ACTUATOR

TECHNICAL PASSPORT

LUGGED BUTTERFLY VALVE WITH SINGLE ACTING PNEUMATIC ACTUATOR DUCTILE IRON BODY

VPG 4648-N07

APPLICATION

VPG butterfly valves are intended for ON/OFF or control use in fluid transfer circuits.

- **Area of use:** water supply, water treatment, pumping, irrigation, industry.




- **Fluids :** cold water, hot water, wastewater, liquid discharges, etc.
«Not suitable for steam application»

GENERAL CHARACTERISTICS

Range : from DN40 to DN300.

- Design according to NF EN 593.
- Type with threaded ears.
- Sealing in both directions of circulation of the piping.
- Soft sleeve guaranteeing a perfect tightness.
- Extended neck compatible with pipe lapping
- Disc profiled and reduced in thickness
- Reduced maneuvering torque.
- Coupling stem on disc assembled by conical pin.
- Reduced head losses.
- ISO 5211 mounting plate.
- With single acting pneumatic actuator.

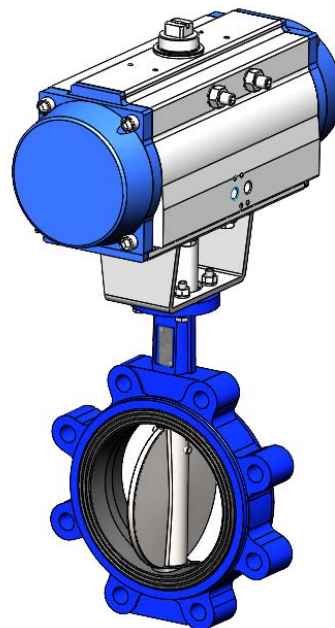

STANDARDS

Design	Manufacture according to the requirements of the European directive 2014/68/UE «Equipment under pressure»: modulate H.
Face to face	Face to face according to standards NF EN 558-1 serie 20, ISO 5272 serie 20, DIN 3202.
Connection	Mounting with flanges : ISO PN10/16 from DN40 to DN150 and PN16 from DN200 to DN300 in accordance with the standards EN1092-2, BS450, AISI B16.1-5.
Tests	Pressure test according to standards EN12266-1, DIN 3230 and ISO 5208: -Body : 1.5 x WP bar -Seat : 1.1 x WP bar

PRODUCT APPROVALS



Tecofi France

83 rue Marcel Mérieux - 69960 Corbas
Tél. +33 (0)4 72 79 05 79 - Fax. +33 (0)4 78 90 19 19
E-mail : sales@tecofi.fr - www.tecofi.fr




BUTTERFLY VALVE WITH PNEUMATIQUE ACTUATOR

TECHNICAL PASSPORT

VPG 4648-N07

CONSTRUCTION

Component	Coating
Body (1)	Oven backed epoxy coated body RAL 5015, thickness 150µ

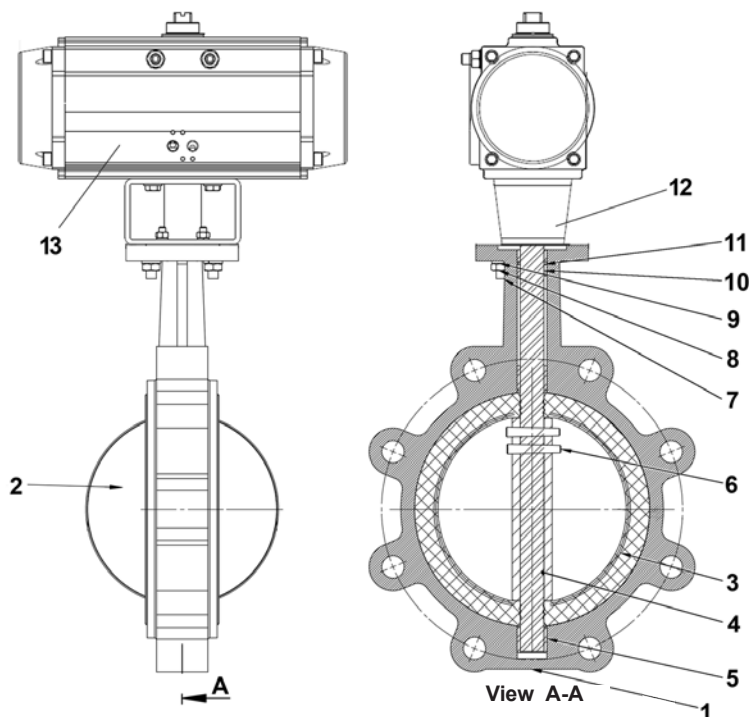

Pos.	Q-ty	Description	Material	Equivalences		
				DIN	ASTM	BS
1	1	Body	Ductile iron EN-GJS-400	GGG40	A536 65-45-12	EN-JS1030
2	1	Disc	Ductile iron EN-GJS-400 + Nickel	GGG40	A536 65-45-12	EN-JS1030
3	1	Sleeve	Heat EPDM			
4	1	Stem	Stainless steel 420	X20Cr13		
5	2	Bushing	PTFE			
6	2	Pin	Stainless steel 420	X20Cr13		
7	2	Screw	Stainless steel 304/A2			
8	2	Nut	Stainless steel 304/A2			
9	2	Washer	Stainless steel 304/A2			
10	2	Bushing	PTFE			
11	1	O ring	EPDM			
12	1	Arcade	Stainless steel 304			
13	1	Actuator	Single acting pneumatic actuator			

Tecofi France

83 rue Marcel Mérieux - 69960 Corbas
Tél. +33 (0)4 72 79 05 79 - Fax. +33 (0)4 78 90 19 19
E-mail : sales@tecofi.fr - www.tecofi.fr




BUTTERFLY VALVE WITH PNEUMATIQUE ACTUATOR

TECHNICAL PASSPORT

VPG 4648-N07

DIMENSIONS

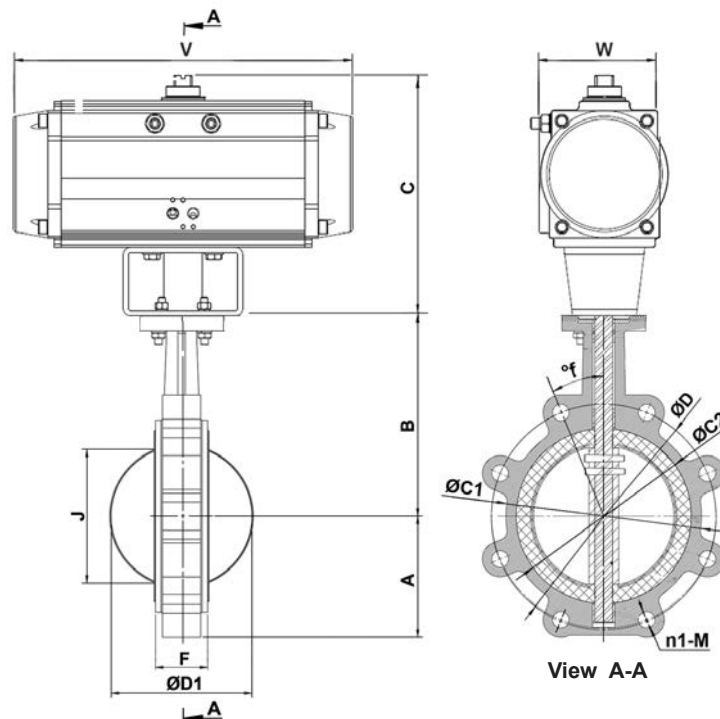

DN		A	B	C	ØC1	ØC2	ØD	ØD1	n1-M	F	J	f°	Référence actionneur*	V	W	Poids (kg)
mm	inch															
40	1"1/2	60	102	128	88	71	110	43	4-M16	33	29	45°	TSR-063	169	80.5	4.2
50	2"	60	128	128	93	75	125	53	4-M16	43	31	45°	TSR-083	169	80.5	6.1
65	2"1/2	72	140	149	110	92	145	65	4-M16	45	46	45°	TSR-083	210	91	6.5
80	3"	89	146	157	123	105	160	79	8-M16	46	64	45°	TSR-083	264	103	7.6
100	4"	100	165	170	156	134	180	105	8-M16	52	91	22.5°	TSR-105	272	116	12.9
125	5"	116	175	202	183	158	210	124	8-M16	54.4	111	22.5°	TSR-125	302	134.5	18
150	6"	131	199	282	211	187	240	155	8-M20	56	144	22.5°	TSR-140	398	142	25.4
200	8"	162	220	249	264	236	295	203	12-M20	60	194	15°	TSR-160	456	161	40.3
250	10"	195	251	330	329	291	350	251	12-M24	66	242	15°	TSR-190	534	189	62.5
300	12"	228	288	355	385	342	400	302	12-M24	77	292	15°	TSR-240	536	210	123

* - For using on maximum ΔP of 10 bar under an air supply of 6 bar

WORKING CONDITIONS

Maximum working pressure : 16 bar
(6 bar for compressed air)

Maximum vacuum pressure : -0.8 bar for 10 minutes (vacuum tests performed in October 2021,
valve tested open at -0.8 bar for 10 minutes)

Maximum working temperature : -10°C / +130°C

Tecofi France

83 rue Marcel Mérieux - 69960 Corbas
Tél. +33 (0)4 72 79 05 79 - Fax. +33 (0)4 78 90 19 19
E-mail : sales@tecofi.fr - www.tecofi.fr

