

Ref. : X 2203

Rev. : Initial

Date : 24/10/2013

Page : 1/1

BACKFLOW PREVENTER WITH REDUCED PRESSURE ZONE

X 2203



APPLICATION

General use: water distribution.

GENERAL CHARACTERISTICS

From DN65 to DN100.
 The flow direction is indicated by an arrow on the body
 Horizontal mounting position.
 Flange connection.
 Controlable.
 Low head loss.
 Brass check valves.
 With valves 1/2" BSP.



CONSTRUCTION

8 E	vacuation support	Brass
7 G	asket	NBR
6 D	iaphragm E	PDM
5 S	pring	Stainless steel
4 C	heck valve	Brass
3 S	tem	Stainless steel
2 B	onnet	Bronze
1 B	ody	Bronze
Pos.	Description	Material

DIMENSIONS

DN		L	H	H1	H2	ØD	Weight (kg)
mm	nch						
65	2" 1/2	305	385	132	108	50	17
80	3"	470	484	170	115	80	26.5
100	4"	470	484	170	115	80	28


WORKING CONDITIONS

Maximum working temperature: +5°C / 65°C.

Maximum working pressure : 10 bar.

STANDARDS

Fabrication according to ISO 9001 : 2008
 RF Flange connection according to EN1092-1 ISO PN10.

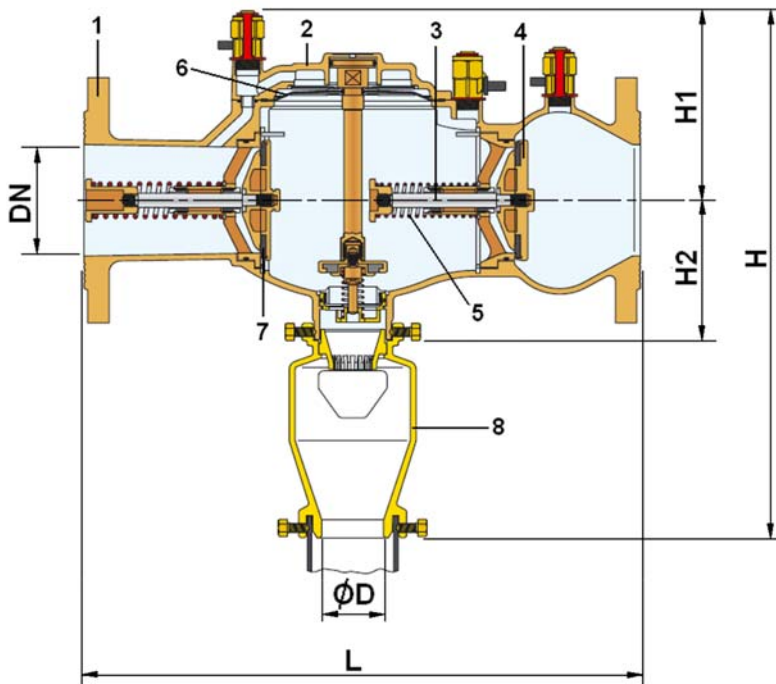

The photographs and technical art works are not contractual. The specifications of the presented products are open to modifications without previous advice.