

BUTTERFLY VALVES

The butterfly valve is a 1/4 turn valve which also allows you to do regulation. These valves are especially adapted for general uses and non-viscous industrial fluids.

BUTTERFLY VALVE WITH SLEEVE «TECFLY»



The butterfly valve with sleeve is particularly suitable for general fluids, such as water, oils and acids.

APPLICATIONS

HVAC
Water treatment
Industry

WORKING PRESSURE

DN40/300 : 16 bar

BUTTERFLY VALVE WITH FLANGES «TECLARGE»



Between flanges or double flanges, this valve is used for neutral liquids such as water.


APPLICATIONS

HVAC
Water treatment

WORKING PRESSURE

DN350/1200 : 10 bar
Option : 16 bar on request

HIGH PERFORMANCE BUTTERFLY VALVE «TECSUP»

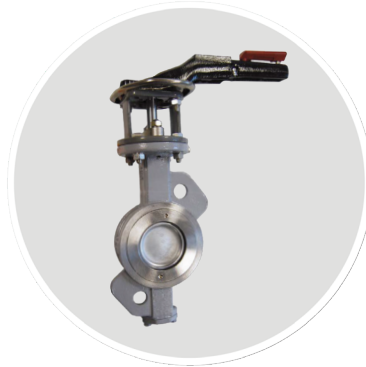

The high performance butterfly valve respond to the most restrictive operating conditions in terms of pressure and temperature.

APPLICATIONS

Steam, Chemical products

WORKING PRESSURE

DN50/600 : 16/25/40/64 bar,
ASA150/300Lbs

Tecofi

VALVE MANUFACTURER - FRANCE

TECOFI FRANCE

83 rue Marcel Mérieux
69960 Corbas - FRANCE

Tél : +33 (0)4 72 79 05 79
Fax : +33 (0)4 78 90 19 19
Mail : sales@tecofi.fr

www.tecofi.fr

PINCH VALVES

The pinch valve is a full bore valve that shuts via manual handwheel or via pneumatic air. It is mainly used in the waste water industry, for sludge, or in the case of abrasive products like pneumatic conveying, or conveying powders or pulverulent substances...

MANUAL PINCH VALVE



CONSTRUCTION

Cast aluminum body with handwheel operator

REPLACABLE SLEEVE

Natural rubber anti-abrasion / EPDM / NBR / Butyl / Hypalon / FPM / Neoprene

WORKING PRESSURE

DN10/65 : 4 bar
DN80/200 : 3 bar

PNEUMATIC PINCH VALVE



CONSTRUCTION

Cast aluminum body operated by air under pressure.

PINCH

Natural rubber anti-abrasion / EPDM / NBR / Neoprene / Butyl / Hypalon / FPM

WORKING PRESSURE

DN40/150 : 6 bar
DN200 : 4 bar
DN250 : 2.5 bar

Tecofi 
VALVE MANUFACTURER - FRANCE



VALVES FOR MINING INDUSTRY



Wafer type bidirectional knife gate valve. One-piece cast iron body. Stainless steel gate.
Two rubber sleeves. Provides high flow rates with low pressure drop. Various seat materials available.
Face to face dimension in accordance with Tecofi standard.

Leader in the manufacturing of knife gate valves, Tecofi has a large range able to respond to all needs and applications.

GENERAL APPLICATIONS

This knife gate valve is suitable for working in the mining industry, in loaded fluid transport lines, such as : water with stones, sludge, etc. and in general it is used for abrasive fluids in the chemical industry and waste water.

Designed for the following applications:

- Mining
- Sewage treatment
- Electrical power stations
- Chemical plants
- Energy Sector
- Thermal power stations

This knife gate valve's main characteristic is that it provides a full continuous flow.

This means that in open position there are no turbulences in the fluid.



Knife gate valves for MINING INDUSTRY

SIZES

DN50 to DN1400 (upper sizes on request).

DIFFERENTIAL PRESSURE

	PN max
DN50 to DN600	10 bar
DN700 to DN1400	6 bar

The pressures indicated in the table, can be used in both directions.


DIRECTIVES

Machinery Directive: DIR 2006/42/EC (MACHINERY)
Pressure Equipment Directive: DIR 97/23/EC (PED) ART.3, P.3
Potential Explosive Atmospheres Directive: DIR 94/9/EC (ATEX) CAT.3 ZONE 2 and 22
GD for further information on categories and zones please contact the Tecofi Technical Commercial Dept.

FLANGE DRILL HOLE

DIN PN10 & ANSI B16.5 (150 LB)

STANDARD KNIFE GATE VALVE

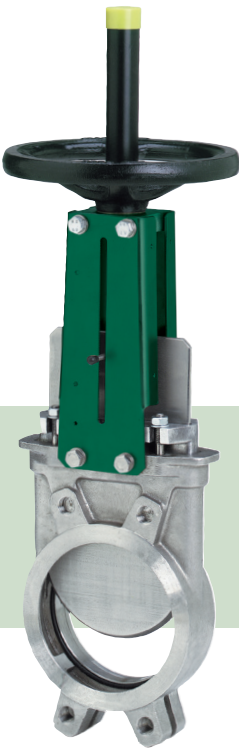

This valve suits to difficult applications, such as pasty products and powders.

UNDER SILO KNIFE GATE VALVE



This knife gate valve was specially developed for an under silo assembly. It allows you to get rid of dry products like dust or grains thanks to blowing holes, which avoid the stuffing and the accumulations of product, so the jamming of the gate.

THROUGH CONDUIT KNIFE GATE VALVE



This valve is a two pieces body without retention area, with two seat seals which allow a bi-directional tightness. This valve is especially adapted for the pulp and paper industry, in pulp outlets. The principal of the gate's movement works like a "cigar cutter".

APPLICATIONS

Pulp and paper Water treatment Wine industry Powders	Silo Cement Powders	Paper industry with impurities (staples)
---	---------------------------	--

WORKING PRESSURE

DN50/250: 10 bar DN300/450: 7 bar DN500/600: 4 bar DN700/1200: 2 bar	DN50/150: 2,5 bar DN200: 2 bar DN250/300: 1,5 bar DN400: 1,3 bar	DN50/250: 10 bar DN300/450: 6 bar DN500/600: 3,5 bar DN700/1200: 2 bar
---	---	---